




## **Technical Features:**

- More diverse designs: Increased variety in design with unique 'Embossed-In-Register' surface design and high-resolution printing for realistic wood visuals
- More stable: Superior dimensional stability with fiberglass stabilization layer
- Safer: Enhanced product safety with anti-bacterial and anti-fungal properties
- More durable: Superior wear resistance, stain resistance and low maintenance costs with EPT™ Shield technology

# **Technical Specification:**

Thickness	<ul> <li>Total thickness: 2mm (Between 1.8mm and 6.5mm available upon lequest)</li> <li>Wear-layer option: 0.5mm &amp; 0.7mm (20mil &amp; 28mil)</li> </ul>
Dimension	Roll length : 20M (Roll lengths of other thickness available upon request)  Roll width : 1.83M / 2M
Installation Type	Glue-down

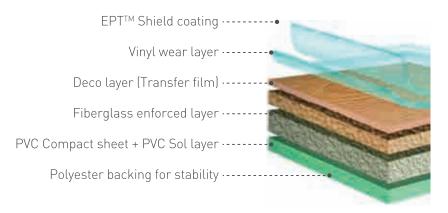

#### Seoul Design Center & Office

KD Center, 355, Hyoryeong-ro, Seocho-gu, Seoul, 06643 Korea

Tel +82-2-520-7600 Fax +82-2-598-9674

#### NOX Corp. | KOREA

Shinho Factory
Shinho 2nd Factory, Yedang
Enbo Factory
Godeok Factory
Bongsan Factory
Deoksan Facory
Choongnam, Korea

#### NOX US | USA

NOX US P.O. Box 824 931 S. Springville Avenue Fostoria, OH 44830

Office (419) 701-5060 Fax (419) 701-5058

### www.noxglobal.com www.noxus.com

E-Mail \_ info@noxglobal.com

